

## Waterproofing Slurry

- efflorescence-free surface waterproofer
- for concrete, masonry and render
- can be used against active or passive water pressure
- available in grey or white

Download the BBA certificate  
[www.bbacerts.co.uk](http://www.bbacerts.co.uk)




### MATERIAL DESCRIPTION

VANDEX BB 75 is a cementitious, ready-mixed, efflorescence-free surface waterproofer with hydrophobic properties, resistant to water and moisture. VANDEX BB 75 is applied to surfaces such as concrete, masonry and render, which have to be sealed and protected against the influence of water and moisture. It may be applied with a masonry brush, trowel or spray equipment. VANDEX BB 75 is waterproof (tested up to 7.0 bar). It can be employed against active and passive water pressures. VANDEX BB 75 is safe to use with potable water. When used on masonry a 3:1 sand cement render is recommended prior to application of VANDEX BB 75.




Approved for use in public water supplies.


### TYPICAL APPLICATIONS

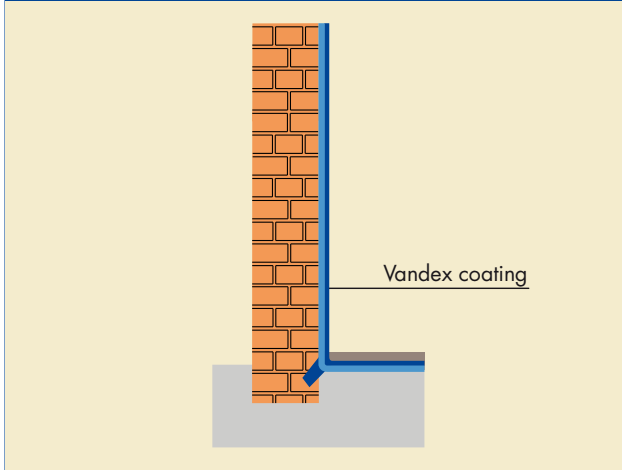


Basement waterproofing

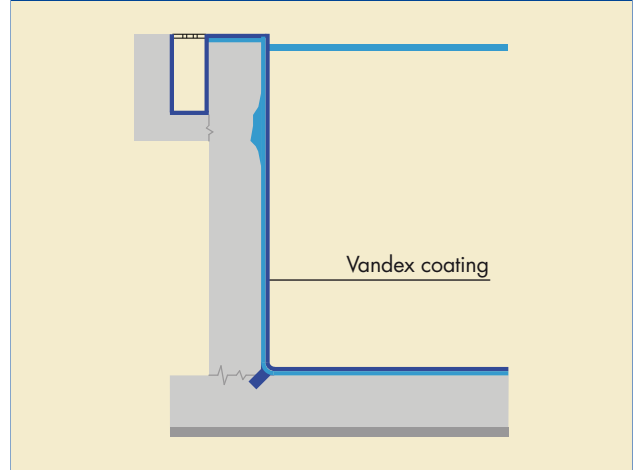

Swimming pool refurbishment

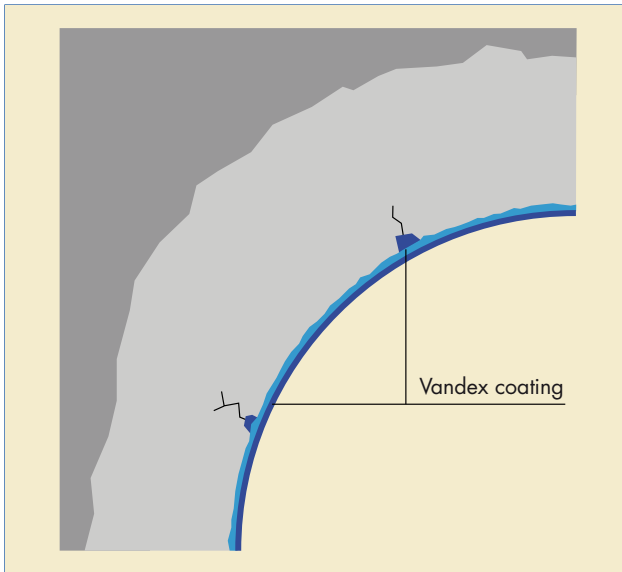

Internal waterproofing of a tunnel

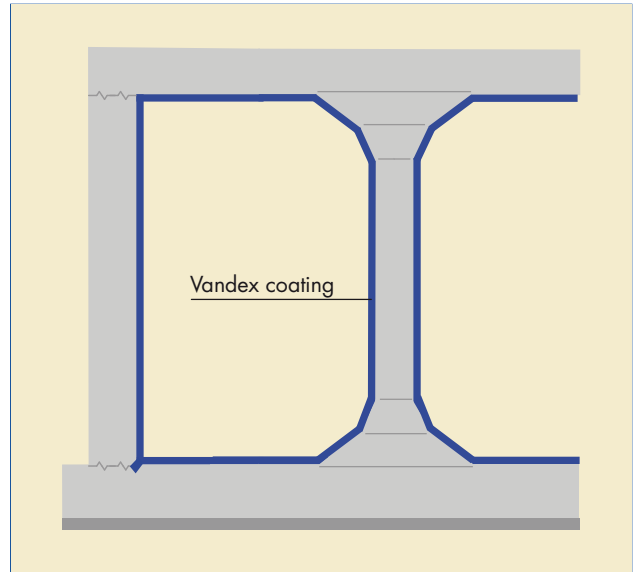

Tanking of a drinking water reservoir

#### TECHNICAL DATA

Aggregate state	grey powder
Bulk density	approx. 1.40 kg/l
Setting time	approx. 2 to 4 hours
Waterproof up to	7 bar

#### ISO 9001:2000 and ISO 14001:2004



Vandex International Ltd is certified according to ISO 9001:2000 and ISO 14001:2004 quality and environmental management systems.

Also available as VANDEX BB WHITE in white colour and as VANDEX BB 75 Z with a high sulphate resistance.